


PT 280

ON LIGHT TRUCK CHASSIS



Working height


SPECIFICATIONS



28m



17,5m




26m



400°



250 kg



Four H-frame
stabilisers



Rotating
basket



≤ 3,5 t



TELESCOPIC AERIAL PLATFORM


ON LIGHT TRUCK CHASSIS

POSSIBLE TYPES OF VEHICLES


- MERCEDES SPRINTER

For other carriers, contact our sales department.

WORKING DIAGRAM

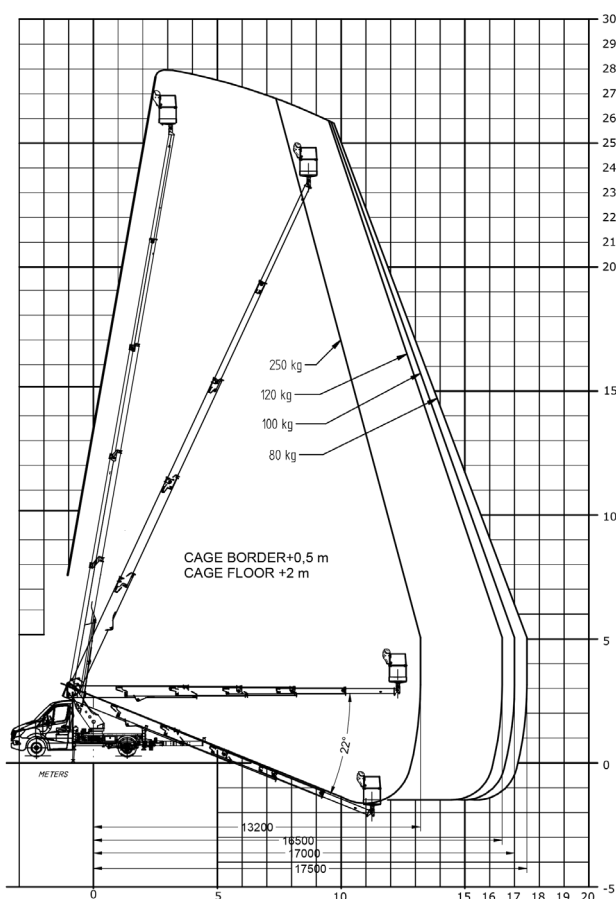

VEHICLE DRAWING

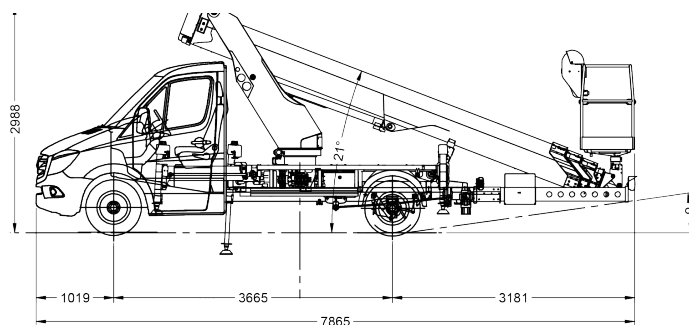

STANDARD SPECIFICATIONS

- Engine start/stop from the basket
- Automatic return (Home function)
- Emergency circuit with manual pump
- Proportional controls on all movements
- Secure access to the work platform
- Conveyor chain for hoses inside the mast for optimal protection
- Rigid PVC protection for upper control station
- 220V circuit in the platform

OPTIONS

- Signaling (tri-flash, 2 flashing lights, bands)
- Low-voltage insulated basket for 1 person or full-opening tubular aluminum basket with safety gate
- Tool boxes
- Aluminum side panels
- Tool holders in the basket
- Extended warranty
- Maintenance package
- Automatic stabilization

For other options, contact our sales department.



Request a demonstration